


TRANSMITTER PINOUT CODE 12

Connector: Female MDM-15

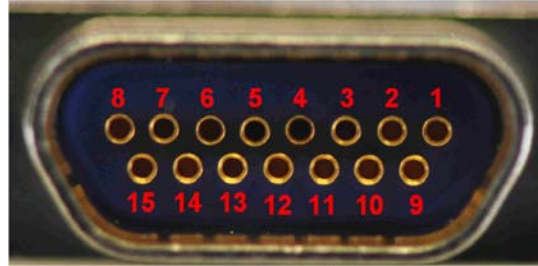

| Pin | Function |
|-----|---|
| 1 | DC Power In |
| 2 | DC Power Return |
| 3 | TTL Clock and Data Ground |
| 4 | Clock In (Differential Positive or TTL) |
| 5 | Data In (Differential Positive or TTL) |
| 6 | Serial Control Ground |
| 7 | RF On/Off |
| 8 | Serial Control Reply from Transmitter |
| 9 | DC Power In |
| 10 | DC Power Return |
| 11 | N/C |
| 12 | Differential Clock Negative |
| 13 | Differential Data Negative |
| 14 | Recall/Holdoff |
| 15 | Serial Control Input to Transmitter |

| | | | |
|----------|--------------|------|------------|
| DRAWING | qsx_pc12.doc | | |
| REVISION | A | | |
| DRAWN | MRE | DATE | 01-04-2017 |
| VERIFIED | DEF | DATE | 01-04-2017 |
| APPROVED | DEF | DATE | 01-04-2017 |

No part of the document may be circulated, quoted, or reproduced for distribution without prior written approval from Quasonix, Inc.