



## TRANSMITTER PINOUT CODE 60

Connector: Female MDM-15

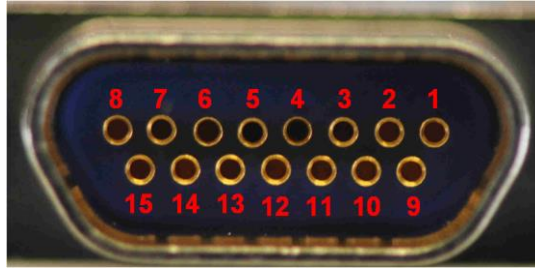

Pin	Function
1	DC Power In
2	DC Power Return
3	Serial Control Reply Positive from Transmitter
4	Differential Clock Positive
5	Differential Data Positive
6	Serial Control Ground
7	RF On/Off
8	Serial Control Input Positive to Transmitter
9	DC Power In
10	DC Power Return
11	Serial Control Reply Negative from Transmitter
12	Differential Clock Negative
13	Differential Data Negative
14	N/C
15	Serial Control Input Negative to Transmitter

## Connector: Male MDM-9

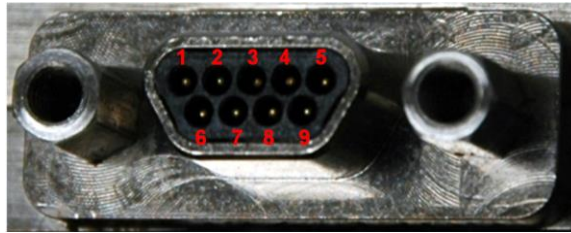

Pin	Function
1	Ground
2	XDC Control Ground (only with option XD)
3	CH1 XDC Control Out (only with option XD)
4	No Connection
5	Transmitter Replies to Switch Box (only with options PF/PM)
6	3.3VDC + Output
7	No Connection
8	CH2 XDC Control Out (only with option XD)
9	Switch Box Commands to Transmitter (only with options PF/PM)

DRAWING	qsx_pc60.docx		
REVISION	E		
DRAWN	MRE	DATE	02-29-2020
VERIFIED	DEF	DATE	03-02-2020
APPROVED	DEF	DATE	03-02-2020

No part of the document may be circulated, quoted, or reproduced for distribution without prior written approval from Quasonix, Inc.