



TRANSMITTER PINOUT CODE 62

Connector: Female MDM-15

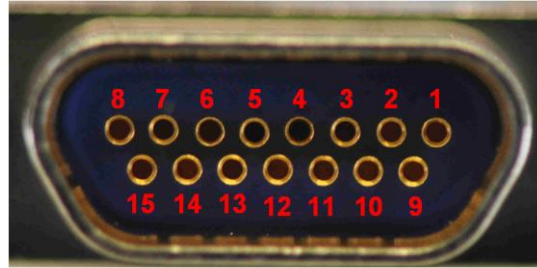

| Pin | Function |
|-----|---------------------------------------|
| 1 | DC Power In |
| 2 | DC Power Return |
| 3 | N/C |
| 4 | Differential Clock Positive |
| 5 | Differential Data Positive |
| 6 | Serial Control Ground |
| 7 | RF On/Off |
| 8 | Serial Control Reply from Transmitter |
| 9 | DC Power In |
| 10 | DC Power Return |
| 11 | N/C |
| 12 | Differential Clock Negative |
| 13 | Differential Data Negative |
| 14 | N/C |
| 15 | Serial Control Input to Transmitter |

Connector: Male MDM-15

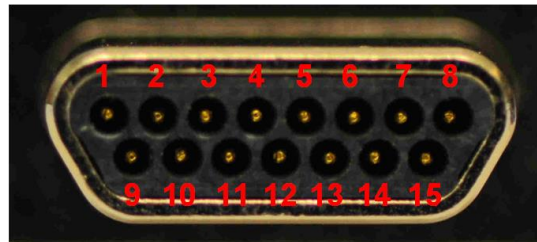

| Pin | Function |
|-----|----------------|
| 1 | BCD Value 1 |
| 2 | BCD Value 2 |
| 3 | BCD Value 4 |
| 4 | BCD Value 8 |
| 5 | BCD Value 10 |
| 6 | BCD Value 20 |
| 7 | BCD Value 40 |
| 8 | BCD Value 80 |
| 9 | BCD Value 100 |
| 10 | BCD Value 200 |
| 11 | BCD Value 400 |
| 12 | BCD Value 800 |
| 13 | BCD Value 1000 |
| 14 | BCD Value 2000 |
| 15 | Ground |

| | | | |
|----------|---------------|------|------------|
| DRAWING | qsx_pc62.docx | | |
| REVISION | B | | |
| DRAWN | MRE | DATE | 08-21-2018 |
| VERIFIED | DEF | DATE | 08-21-2018 |
| APPROVED | DEF | DATE | 08-21-2018 |

No part of the document may be circulated, quoted, or reproduced for distribution without prior written approval from Quasonix, Inc.