


**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUASONIX INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUASONIX INC. IS PROHIBITED.

INCLUDED	HEAT SINK ASSEMBLY, THERMAL INTERFACE MATERIAL, BASE, HEAT SINK TO TRANSMITTER HARNESS, SMA ADAPTER
NOT INCLUDED	TRANSMITTER, ASSEMBLY SCREWS

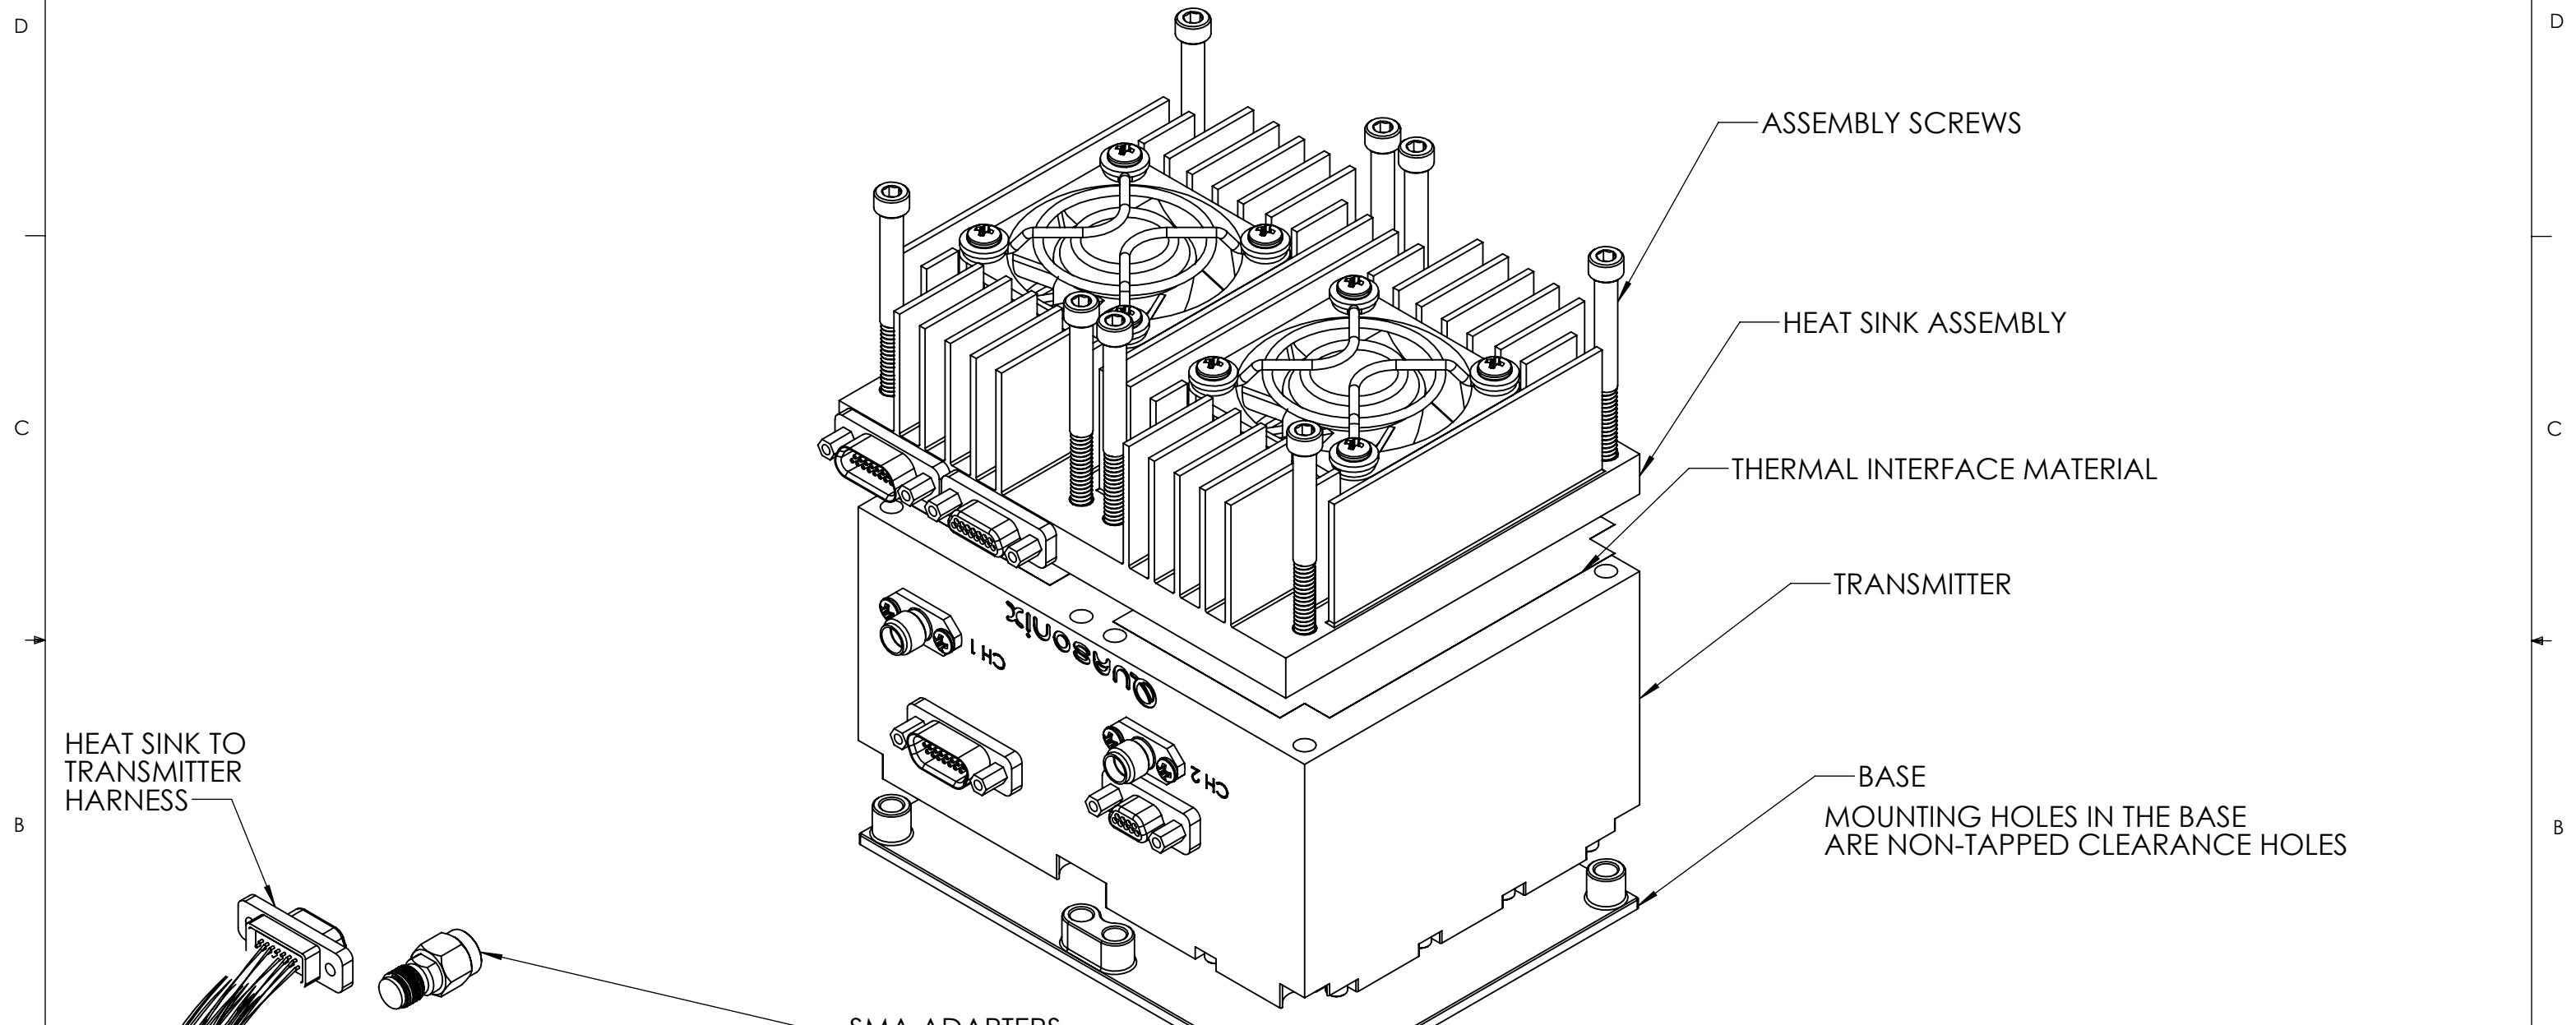

- NOTES:**
- FOR PROPER COOLING ALLOW A MIN. OF .25" CLEARANCE ABOVE HEAT SINK FINS
  - SUPPLIED CABLE HARNESS HAS ONE MALE AND ONE FEMALE MDM-15 CONNECTOR
  - CUSTOMER'S TRANSMITTER MAY HAVE EITHER MALE OR FEMALE MDM-15 CONNECTOR
  - ASSEMBLY SCREWS SHOULD BE ANSI #6-32 SCREWS
  - DRAWING SHOWN WITH A 24AL TRANSMITTER



MOUNTING HARDWARE	TIGHTENING TORQUE	CLAMPING FORCE
#6	9.6 IN-LB +/- 10%	380 LB +/- 10%

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ARE: ANGULAR: MACH/BEND ± .5° ONE PLACE DECIMAL ±0.1 TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.003 FRACTIONS ±1/32 DO NOT SCALE DRAWING		NAME	DATE	
HOLE DIA.		TOLERANCE	DRAWN	
.0135 THRU .125		+.004 -.001	MBS 02/12/2025	
.126 THRU .250		+.005 -.001	ENG APPR.	TITLE: QUASONIX ACCESSORY, TRANSMITTER-POWERED HEAT SINK, 4 X 3
.251 THRU .500		+.006 -.001	MBS 02/12/2025	
.501 THRU .750		+.008 -.001	MATERIAL:	SIZE
.751 THRU 1.000		+.010 -.001	FINISH:	DWG. NO.
1.001 THRU 2.000		+.012 -.001		SCALE: 1:2
			CAGE CODE: 3CJA9	A
			SHEET 1 OF 2	

8 7 6 5 4 3 2 1

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUASONIX INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUASONIX INC. IS PROHIBITED.

D  
C  
B  
A

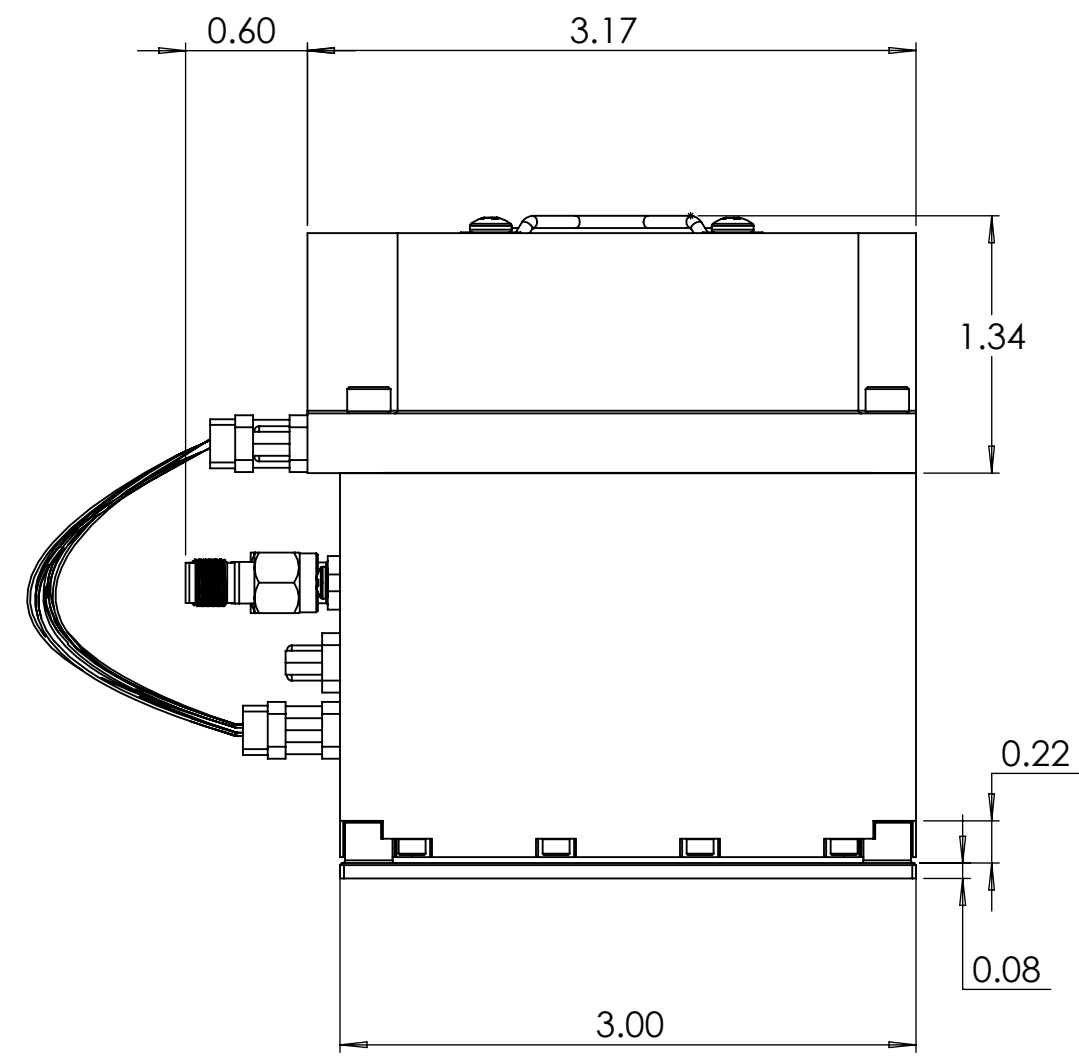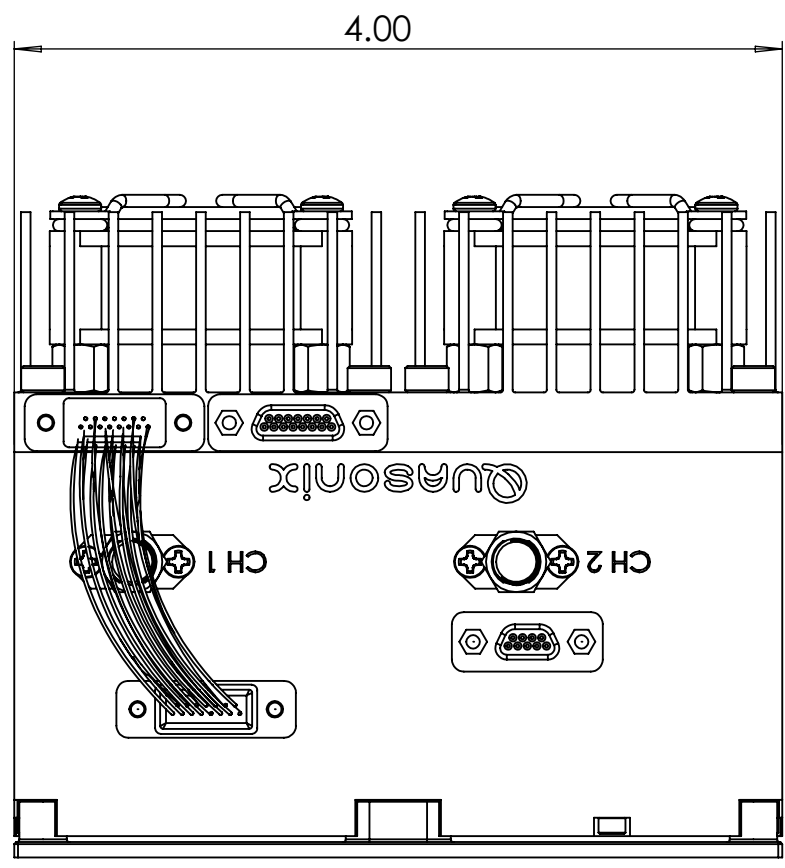

8 7 6 5 4 3 2 1

SIZE <b>B</b>	DWG. NO. QSX-AC-34-HS-28V-SP	REV A
SCALE: 1:2	CAGE CODE: 3CJA9	SHEET 2 OF 2

D  
C  
B  
A