
MADE IN USA

S-BAND picoTX™

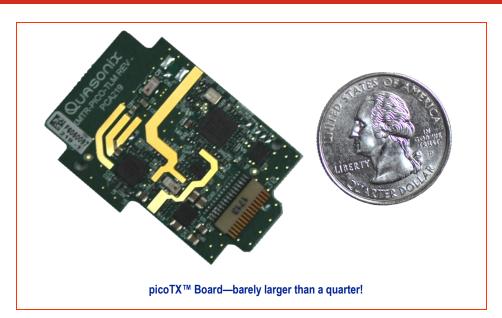

Quasonix introduces the world's smallest 1 Watt transmitter. If your flight test requires minimal weight and power consumption with maximum transmitter performance, the picoTX™ is your solution.

• Extremely Flexible, Small Transmitter

Mounts easily in every telemetry system with no heat-sinking required—the frequency-agile picoTX™ measures only one inch by one and a half inches; Good things come in small packages!

Weighs in at a mere 0.20 oz.

• Built-in Microcontroller

Supports automatic tuning to the programmed frequency—no external controller needed

Low Power Consumption Equals Longer Flights Operates at 5 V 10 mW to 1 W

- PCM/FM (ARTM Tier 0)
- Designed for High Shock Environments



picoTX™ Board with Quarter

All Quasonix transmitter products are under U.S. Dept. of Commerce jurisdiction categorized as EAR 99

www.quasonix.com

QSX-CATALOG-220113

S-BAND picoTX™ SPECIFICATIONS

Main Section

Modulation type	PCM/FM (ARTM Tier 0)
Carrier frequency tuning range	S band: 2200.5 - 2394.5 MHz
RF output power	10 mW to 1 W
Carrier frequency accuracy	± 2.5 ppm over temperature ± 7.5 ppm, all causes, including aging over 5 years
Data (bit) rate*	Fixed bit rate up to 10 Mbps
Pre-mod filtering bandwidth	0.7 x bit rate
Input voltage	5.0 VDC
Input current	900 mA @ 5.0 V for 1 Watt output power
Signal interfaces	TTL Modulation Input

Environmental Section

-40°C to +85°C
-40°C to +85°C (all models)
0 to 95% (non-condensing)
Up to 100,000 ft.

Physical Section

Dimensions (inches)	1.050" (W) x 1.550" (L) x 0.183" (H)
Weight	0.20 oz

^{*} When ordering, specify the desired frequency and bit rate.

With razor-sharp focus on the aeronautical telemetry market and a team rich in talent, experience, and sheer determination, Quasonix is able to consistently design, develop and manufacture what our customers regard as market-leading telemetry products.

Quasonix is...Reinventing Telemetry™

