


Reinventing Telemetry™

QUASONIX


Adopted by the Range Commander's Council, IRIG 106-17, Appendix 2-E

SPACE TIME CODING (STC) SYSTEM

UPPER ■ LOWER ■ COMPOSITE ■

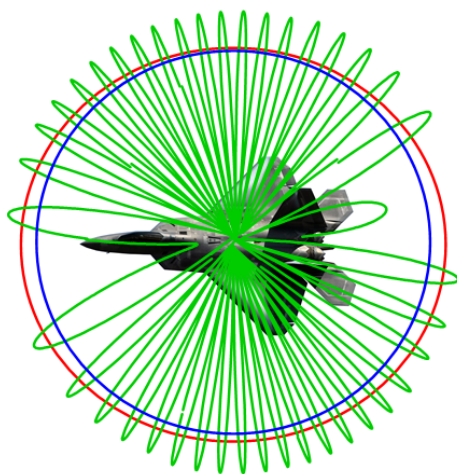


Without Space-Time Coding

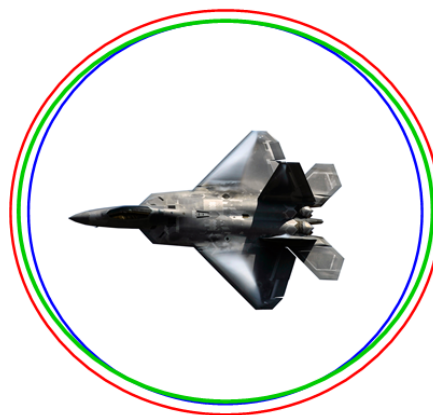

With Space-Time Coding

Radiation Pattern with Dual Antennas

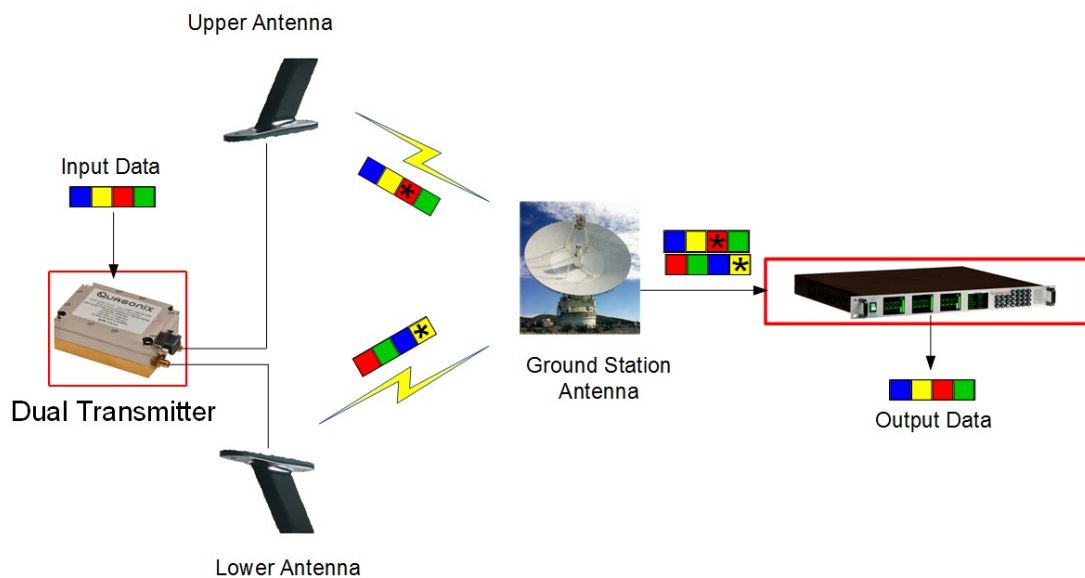

**Complete Telemetry System using a Quasonix Space Time Coded Transmitter and Receiver
With only 4% bandwidth expansion!**


www.quasonix.com

ISO 9001:2015
Certified

Specifications subject to change without notice

SPACE TIME CODING (STC) SOLUTION

Illustrations and flight test data used with permission of the authors—originally published in “Space-Time Coding for Aeronautical Telemetry: Part II” - Experimental Results by Michael Rice, Brigham Young University, and Kip Temple, Air Force Flight Test Center, Edwards AFB, California, USA, in *Proceedings of the International Telemetry Conference, Las Vegas, NV, October, 2011*.

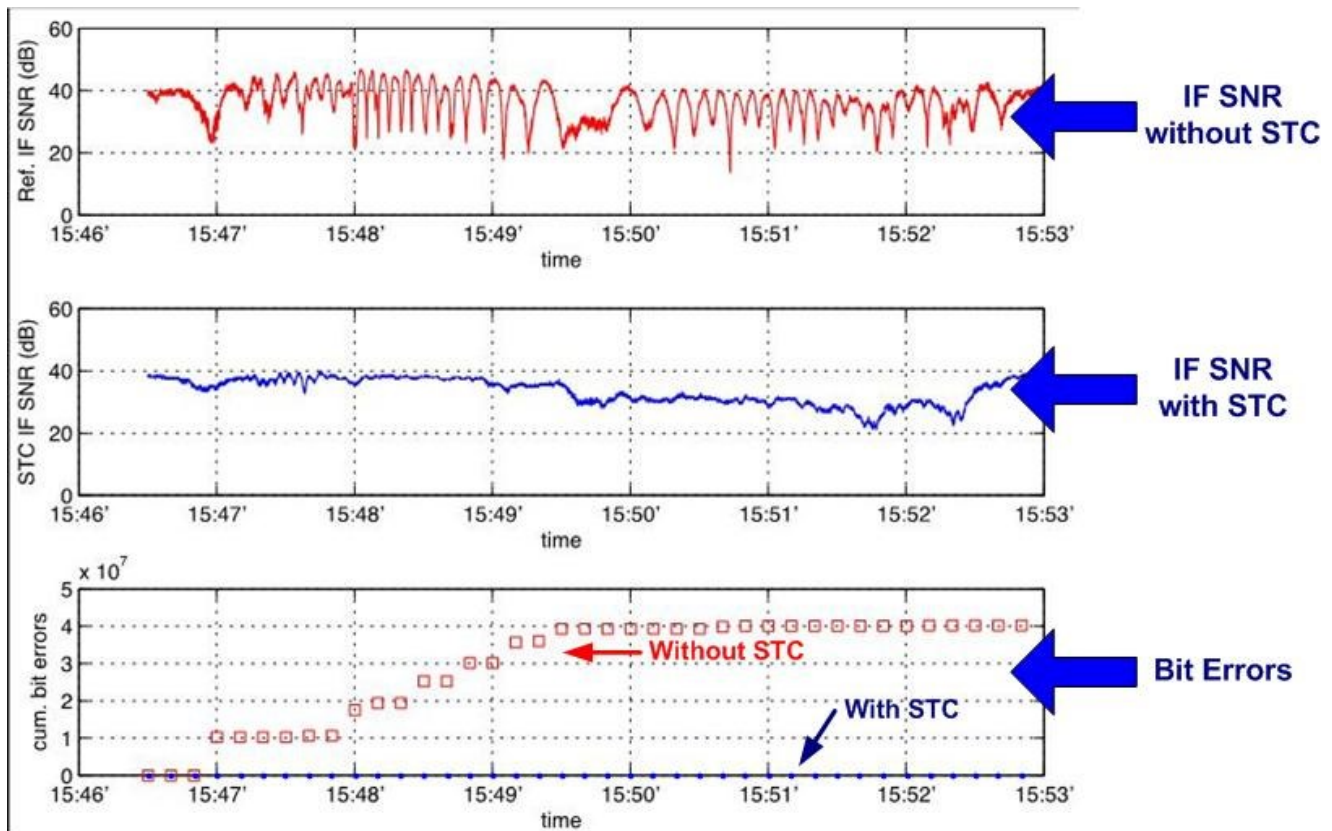

Problem: “Two-antenna interference”

- Upper and lower antennas are required to provide LOS path during aircraft maneuvers
- Signals can cancel each other, creating antenna pattern nulls

Solution: Space Time Coding (STC)

Advantages of the Quasonix Space Time Coding Solution:

- **Eliminates link outages caused by the “two-antenna problem”**
 - Improves behavior of received signal power
 - Improves overall link availability
- **Two transmit/One receive configuration**
 - Compatible with standard telemetry applications and installations
- **STC signal spectrum is the same as SQPSK, with minimal bandwidth expansion (4%)**
- **Available as a software upgrade to Quasonix RDMS™ Telemetry Receivers.**
Note: Quasonix Dual Transmitter required.