



PRIMARY CONNECTOR
21 PIN NANO-D SOCKET
NK-1D2-021-228-TH00

RF OUTPUT CONNECTOR
SMA

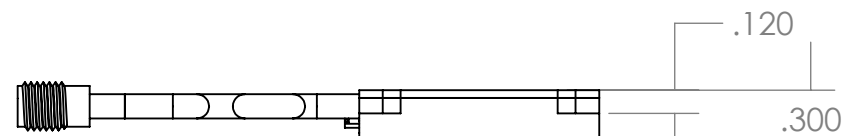

HEAT SINK THIS SURFACE

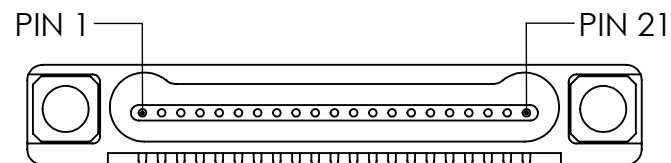

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUASONIX INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUASONIX INC. IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES		DRAWN	NFE 6/16/14
		TOLERANCES:		CHECKED	
		ANGULAR: MACH ±1 BEND ±1		ENG APPR.	
		TWO PLACE DECIMAL ±0.01		MFG APPR.	
		THREE PLACE DECIMAL ±0.003		Q.A.	
		INTERPRET GEOMETRIC TOLERANCING PER:		COMMENTS:	
		MATERIAL			
NEXT ASSY	USED ON	FINISH			
APPLICATION					

POWER	WEIGHT
1W, 2W	1.31 OZ
5W, 10W	2.16 OZ



TITLE: 01AD

SIZE DWG. NO. REV
B QSX-TX-01AD A

SCALE: 1:1 WEIGHT: ABOVE SHEET 1 OF 1