

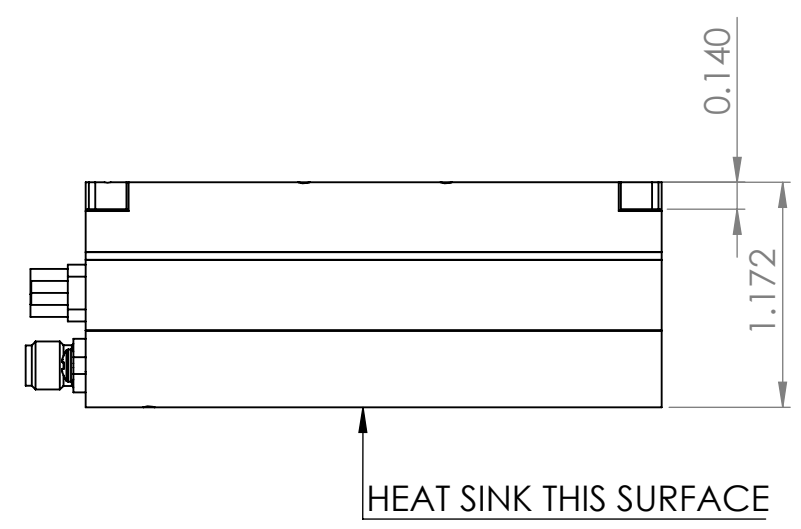



MOUNTING HARDWARE	TIGHTENING TORQUE	CLAMPING FORCE
#6 (MINIMUM SCREW LENGTH: 1 3/8")	9.6 IN-LB +/- 10%	380 LB +/- 10%

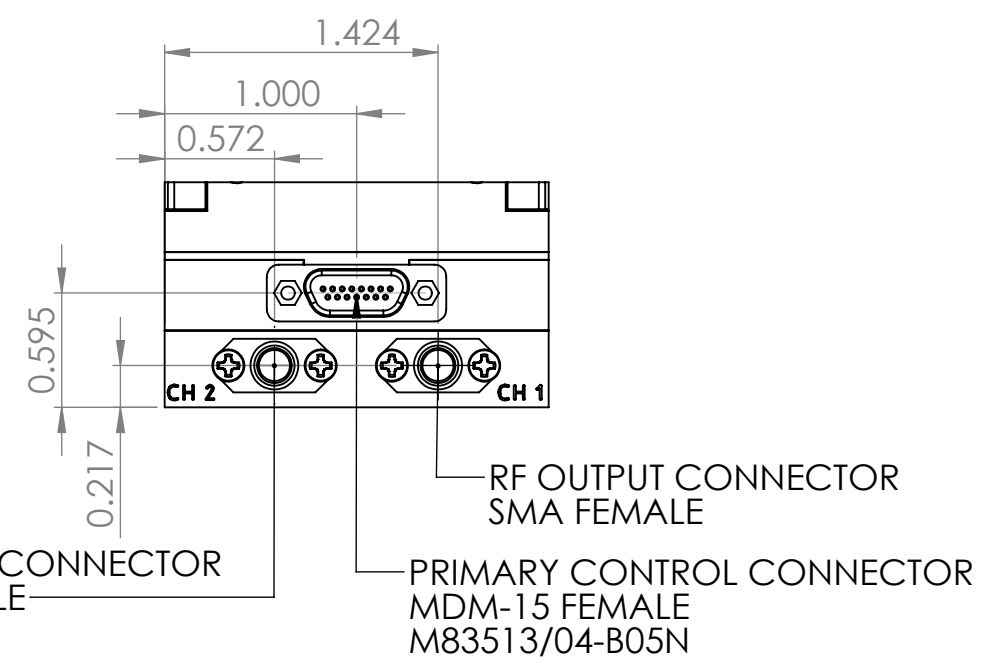

RF OUTPUT CONNECTOR SMA FEMALE  
PRIMARY CONTROL CONNECTOR MDM-15 FEMALE M83513/04-B05N

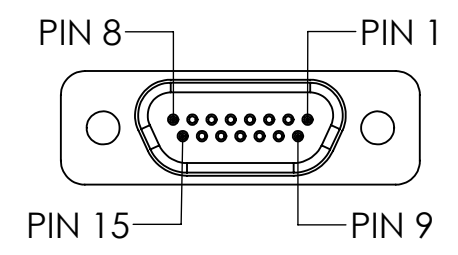

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 <b>TITLE:</b> 07AH	
DIMENSIONS ARE IN INCHES		DRAWN	NFE		3/7/16
TOLERANCES:		CHECKED			
ANGULAR: MACH ±1 BEND ±1		ENG APPR.			
TWO PLACE DECIMAL ±0.01		MFG APPR.			
THREE PLACE DECIMAL ±0.003		Q.A.			
INTERPRET GEOMETRIC TOLERANCING PER:		COMMENTS:			
MATERIAL					
FINISH					
<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUASONIX INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUASONIX INC. IS PROHIBITED.		SIZE	DWG. NO.	REV	
		<b>B</b>	QS-TX-07AH	A	
		SCALE: 1:1		SHEET 1 OF 1	

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

D  
C  
B  
A

D  
C  
B  
A