
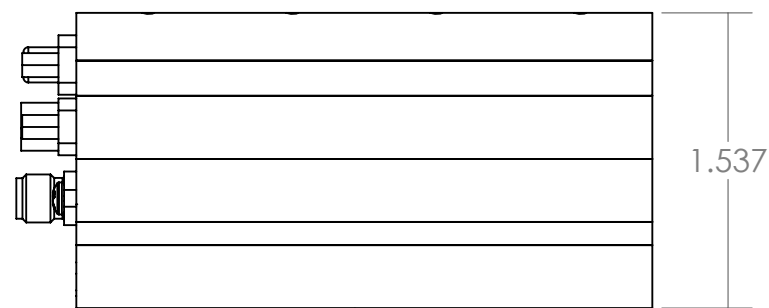



MOUNTING HARDWARE	TIGHTENING TORQUE	CLAMPING FORCE
#6 (MINIMUM 1.75" SCREW LENGTH)	9.6 IN-LB +/- 10%	380 LB +/- 10%

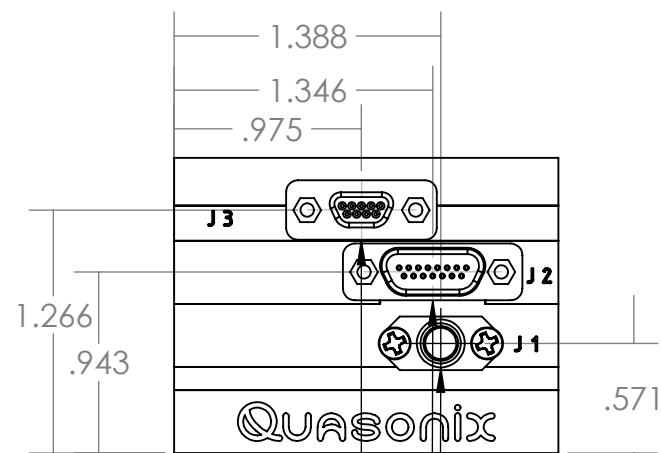

HEAT SINK THIS SURFACE

SECONDARY CONNECTOR
MDM-9 MALE
M83513/03-A05N

RF OUTPUT CONNECTOR
SMA
PRIMARY INTERFACE CONNECTOR
MDM-15 FEMALE
M83513/04-B05N

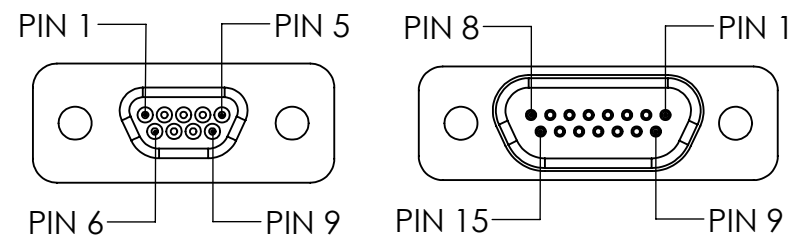

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUASONIX INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUASONIX INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	NFE 10/22/13
TOLERANCES:		CHECKED	
ANGULAR: MACH ±1 BEND ±1		ENG APPR.	
TWO PLACE DECIMAL ±0.01		MFG APPR.	
THREE PLACE DECIMAL ±0.003		Q.A.	
INTERPRET GEOMETRIC TOLERANCING PER:		COMMENTS:	
MATERIAL			
FINISH			
NEXT ASSY	USED ON		
APPLICATION			

POWER	WEIGHT
XXXX	XX.XX OZ

Quasonix

TITLE: 07AJ

SIZE	DWG. NO.	REV
B	QSX-TX-07AJ	-

SCALE: 1:1 SHEET 1 OF 1