
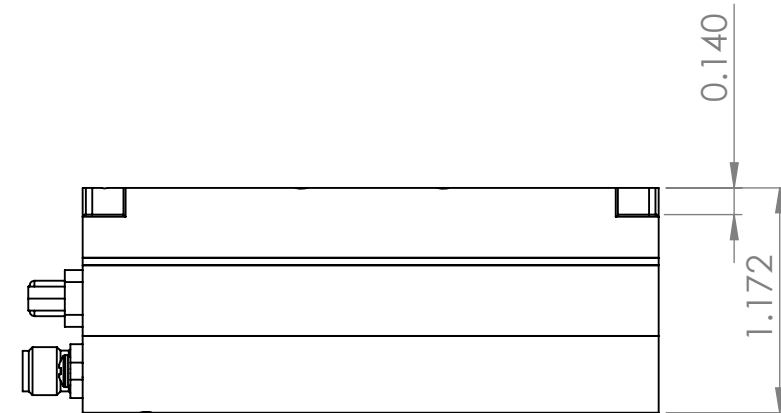



MOUNTING HARDWARE	TIGHTENING TORQUE	CLAMPING FORCE
#6 (MINIMUM SCREW LENGTH: 1 3/8")	9.6 IN-LB +/- 10%	380 LB +/- 10%

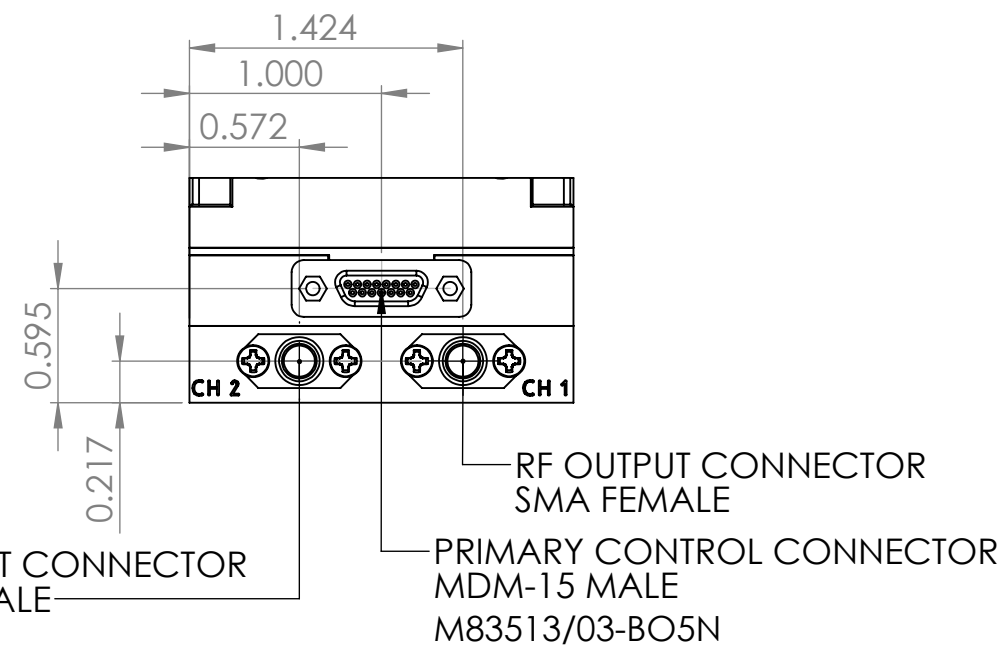

HEAT SINK THIS SURFACE

RF OUTPUT CONNECTOR SMA FEMALE

RF OUTPUT CONNECTOR SMA FEMALE
PRIMARY CONTROL CONNECTOR MDM-15 MALE M83513/03-BO5N

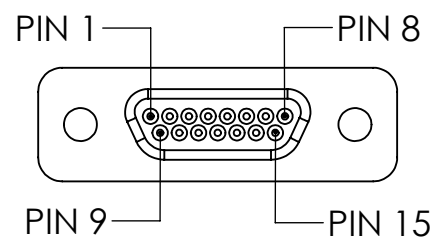

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
ANGULAR: MACH ±1 BEND ±1
TWO PLACE DECIMAL ±0.01
THREE PLACE DECIMAL ±0.003

INTERPRET GEOMETRIC TOLERANCING PER:

MATERIAL

FINISH

	NAME	DATE
DRAWN	NFE	5/2/16
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

COMMENTS:

Quasonix

TITLE:

07AN

SIZE

DWG. NO.

REV

B

QS-TX-07AN

-

SCALE: 1:1

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUASONIX INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUASONIX INC. IS PROHIBITED.