
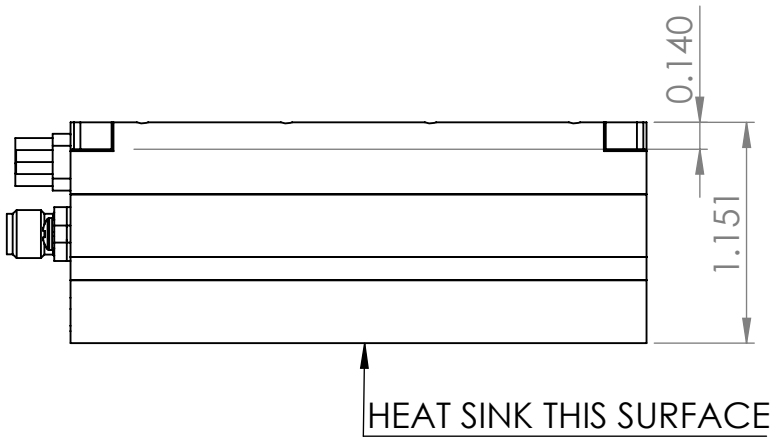


| MOUNTING HARDWARE | TIGHTENING TORQUE | CLAMPING FORCE |
|----------------------------------|-------------------|----------------|
| #6 (MINIMUM SCREW LENGTH: 1.25") | 9.6 IN-LB +/- 10% | 380 LB +/- 10% |

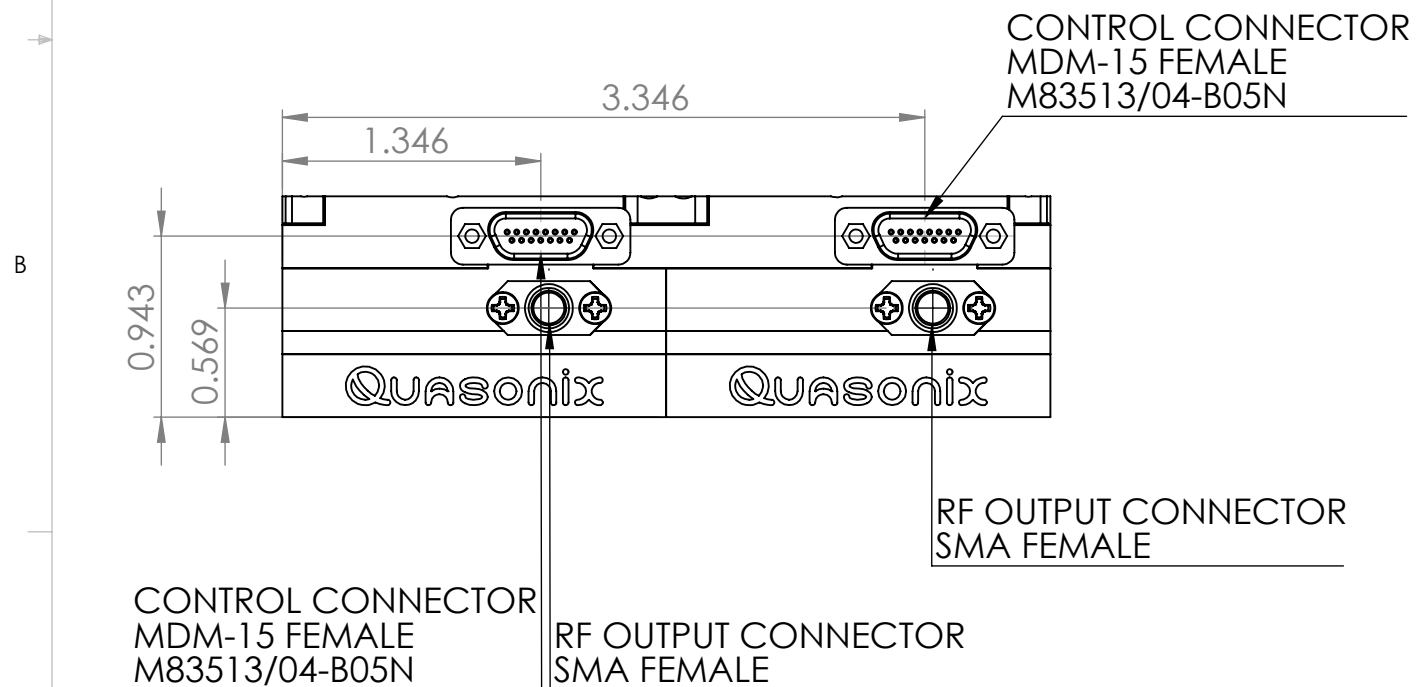

CONTROL CONNECTOR
MDM-15 FEMALE
M83513/04-B05N

RF OUTPUT CONNECTOR
SMA FEMALE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUASONIX INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUASONIX INC. IS PROHIBITED.

| | | |
|--------------------------------------|------|---------|
| UNLESS OTHERWISE SPECIFIED: | NAME | DATE |
| DIMENSIONS ARE IN INCHES | NFE | 1/11/16 |
| TOLERANCES: | | |
| ANGULAR: MACH ±1 BEND ±1 | | |
| TWO PLACE DECIMAL ±0.01 | | |
| THREE PLACE DECIMAL ±0.003 | | |
| INTERPRET GEOMETRIC TOLERANCING PER: | | |
| MATERIAL | | |
| FINISH | | |

| | | |
|-------------|--------------|-----|
| | | |
| TITLE: 14AF | | |
| SIZE | DWG. NO. | REV |
| B | QS-TX-14AF | - |
| SCALE: 1:1 | SHEET 1 OF 1 | |