


TRANSMITTER PINOUT CODE 18

Connector: Female MDM-15

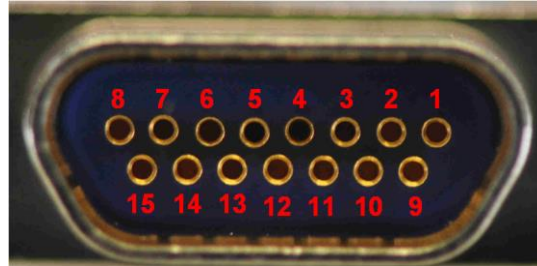

Pin	Function
1	DC Power In
2	DC Power Return
3	Preset Bit 2
4	Differential Clock Positive
5	Differential Data Positive
6	Serial Control Ground
7	Preset Bit 3
8	Serial Control Reply from Transmitter
9	DC Power In
10	DC Power Return
11	Preset Bit 0
12	Differential Clock Negative
13	Differential Data Negative
14	Preset Bit 1
15	Serial Control Input to Transmitter

DRAWING	qsx_pc18.docx		
REVISION	B		
DRAWN	MRE	DATE	08-17-2018
VERIFIED	DEF	DATE	08-17-2018
APPROVED	DEF	DATE	08-17-2018

No part of the document may be circulated, quoted, or reproduced for distribution without prior written approval from Quasonix, Inc.