


TRANSMITTER PINOUT CODE 24

Connector: Female MDM-15

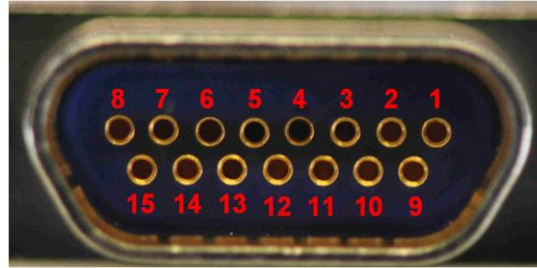

Pin	Function
1	DC Power In
2	DC Power Return
3	TTL Clock and Data Ground
4	Clock In (Differential Positive or TTL)
5	Data In (Differential Positive or TTL)
6	Serial Control Ground
7	Preset Bit 2
8	Serial Control Reply from Transmitter
9	DC Power In
10	DC Power Return
11	Preset Bit 0
12	Differential Clock Negative
13	Differential Data Negative
14	Preset Bit 1
15	Serial Control Input to Transmitter

DRAWING	qsx_pc24.docx		
REVISION	B		
DRAWN	MRE	DATE	08-17-2018
VERIFIED	DEF	DATE	08-17-2018
APPROVED	DEF	DATE	08-17-2018

No part of the document may be circulated, quoted, or reproduced for distribution without prior written approval from Quasonix, Inc.