


TRANSMITTER PINOUT CODE 34

Connector: Male MDM-15

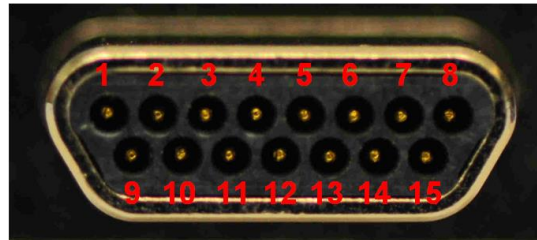

Pin	Function
1	Serial Control Reply from Transmitter
2	RF On/Off
3	Serial Control Ground
4	Data In (Differential Positive or TTL)
5	Clock In (Differential Positive or TTL)
6	TTL Clock and Data Ground
7	DC Power Return
8	DC Power In
9	Serial Control Input to Transmitter
10	N/C
11	Differential Data Negative
12	Differential Clock Negative
13	N/C
14	DC Power Return
15	DC Power In

DRAWING	qsx_pc34.docx		
REVISION	B		
DRAWN	MRE	DATE	08-20-2018
VERIFIED	DEF	DATE	08-20-2018
APPROVED	DEF	DATE	08-20-2018

No part of the document may be circulated, quoted, or reproduced for distribution without prior written approval from Quasonix, Inc.