



## **RANSMITTER PINOUT CODE 46**

**Connector: Female MDM-15**

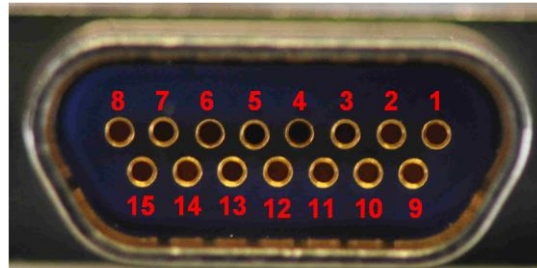

Pin	Function
1	DC Power In
2	DC Power Return
3	No Connection
4	Differential Clock Positive
5	Differential Data Positive
6	Serial Control Ground
7	RF On/Off
8	Serial Control Reply from Transmitter
9	DC Power In
10	DC Power Return
11	No Connection
12	Differential Clock Negative
13	Differential Data Negative
14	Recall/Holdoff
15	Serial Control Input to Transmitter

## Connector: Male MDM-15

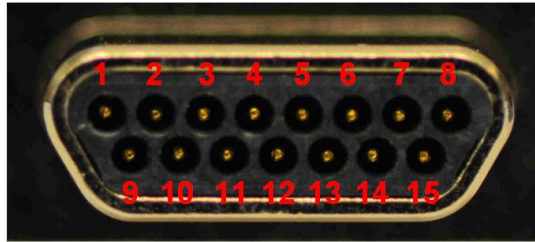

Pin	Function
1	No Connection
2	BCD Value 80
3	BCD Value 40
4	BCD Value 20
5	BCD Value 10
6	BCD Value 8
7	BCD Value 4
8	BCD Value 2
9	BCD Value 1
10	No Connection
11	+28 VDC
12	+28 VDC
13	RF On/Off
14	+28 Return
15	+28 Return

DRAWING	qsx_pc46.docx		
REVISION	A		
DRAWN	MRE	DATE	08-20-2018
VERIFIED	DEF	DATE	08-20-2018
APPROVED	DEF	DATE	08-20-2018

No part of the document may be circulated, quoted, or reproduced for distribution without prior written approval from Quasonix, Inc.