



TRANSMITTER PINOUT CODE 62

Connector: Female MDM-15

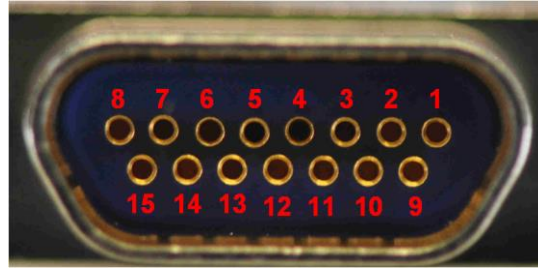

Pin	Function
1	DC Power In
2	DC Power Return
3	N/C
4	Differential Clock Positive
5	Differential Data Positive
6	Serial Control Ground
7	RF On/Off
8	Serial Control Reply from Transmitter
9	DC Power In
10	DC Power Return
11	N/C
12	Differential Clock Negative
13	Differential Data Negative
14	N/C
15	Serial Control Input to Transmitter

Connector: Male MDM-15

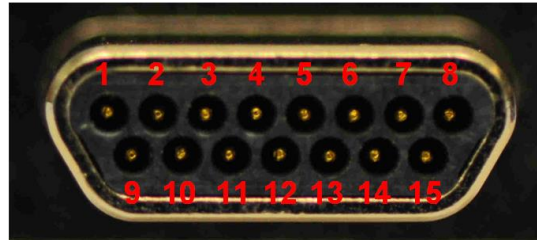

Pin	Function
1	BCD Value 1
2	BCD Value 2
3	BCD Value 4
4	BCD Value 8
5	BCD Value 10
6	BCD Value 20
7	BCD Value 40
8	BCD Value 80
9	BCD Value 100
10	BCD Value 200
11	BCD Value 400
12	BCD Value 800
13	BCD Value 1000
14	BCD Value 2000
15	Ground

DRAWING	qsx_pc62.docx		
REVISION	B		
DRAWN	MRE	DATE	08-21-2018
VERIFIED	DEF	DATE	08-21-2018
APPROVED	DEF	DATE	08-21-2018

No part of the document may be circulated, quoted, or reproduced for distribution without prior written approval from Quasonix, Inc.